






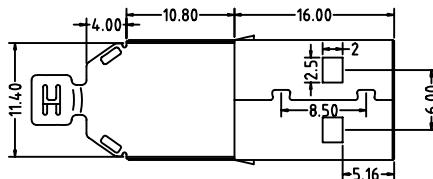


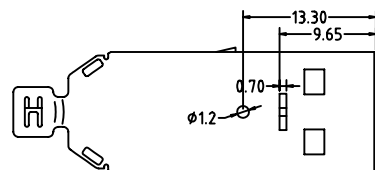


RoHS Compliant

ECN NO REV DESCRIPTION DATE REVISER APPD

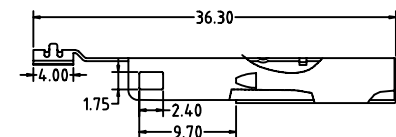

Note:
1.Material:
1.1 Housing:PBT+30%G/F.BLUE UL94V-0.
1.2 Shell:BRASS C2680R-H.
1.3 Contact:PHOSPHOR BRONZE C2680/C5191
2.FINISH:
2.1 CONTACT Plate with Gold 15U" Plate
2.2 shell:Nickel 80U"(MIN) Plate
3.Specification:
3.1 Dielectric withstanding voltage:100V(AC).
3.2 Contact resistance:50mΩ Max
3.3 Insulation resistance:100MΩ Min

xx xx xx xx 外壳脚高, 普通型为:01, 高脚型为:02
端子镀层, G/F为:0, 3°为:3, 15°为:15, 30°为:30
外壳材质, 铁合金为:01, 铜合金为:02
胶芯颜色, 白色:01, 黑色:02, 兰色:03



4	USB3.0 A 公 焊线式 下铁壳	SPCC	1
3	USB3.0 A 公 焊线式 上铁壳	SPCC	1
2	USB3.0 A 公 焊线式 端子	PHOSPHOR BRONZE	4
1	USB3.0 A 公 焊线式 胶芯	PBT+30%GF	1
序号	产品名称	材 质	量 数

TOLERANCE UNSPECIFIED 尺寸公差 角度公差 X.=±0.25 .X=±0.15 .XX=±0.1		BossConn	
DRAWN: Andy 2009/09/21		SCALE NON	UNIT mm
DESIGNER:		NAME	
CHECKED:		USB 3.0 A Type, Male, Soldering	
APPROVED:		DRAWING NO. BSC-USB3-AM-S-XXXXXXXXX	
		SHEET 1/1	
		REV A	